


Instruction of Remote Control Unit

Focus control (Near & Far) when controlling Camera

FAR key for (-) & NEAR key for (+) when setting the screen menu

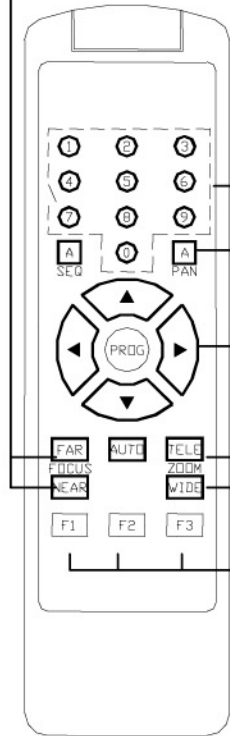

EPC-300

Camera selection when controlling Camera

Keys to select the camera ID number 1 ~ 9

Auto Pan When controlling Cameras

※ Auto panning stops when Left or right arrow key is pressed

※ Auto panning stops automatically after operation stops for 10 minutes

View Direction Control Keys

When controlling cameras

Keys for setting 2-digit Camera ID

ID F1 = UNIT 10 / F2 = 20 / F3 = 30

Ex) When assign the camera ID 17, press F1 and 7

Can be set up to 39 cameras IDs


TELE & WIDE Zoom Control when controlling Camera

TELE key for Scroll-up & Wide key for Scroll-down when setting the screen menu

Make sure to press a desired **camera ID# key** and **PROG key** to begin to control the connected camera


Cable Connection (Up to 39 Cameras)

Control up to 39 of RS-485 Compatible PTZ Cameras



Video-in to Monitoring System

RS-485 Connection to IR Converter




Recording Device


Wireless Remote Controller

Insert batteries into the wireless remote control unit and make sure to press a desired **camera ID# key** and **PROG key** to begin to control the connected camera

IR Converter



Power
DC 12V-500mA



RS-485 Connection Block
White Block (+) / Black Block (-)